

HIVE 450

USER MANUAL


www.azzatek.com

1. Specifications
2. Chassis Parts
3. Control Panel Functions
4. 3.5"/2.5" HDD/SSD Installation
5. Cooling System Installation
6. Fan Installation
7. ARGB Control Modes Switching

Specifications


| Model | |
|--------------------------------|---|
| Model Name: | HIVE 450 |
| Model Number: | CSAZ-450M |
| Specifications | |
| Type: | ATX Mid Tower |
| Color: | Black/Black(interior) |
| Side Panel Window: | Left side panel: tempered glass with rubber mounts |
| Max CPU Cooler Height: | UP to 165mm |
| Max Video Card Length: | Up to 360mm long video card |
| Power Supply: | Not Included |
| Motherboard Compatibility: | <270mm E-ATX \ ATX \ Micro ATX \ ITX |
| Expansion | |
| External 5.25" Drive Bays: | 0 |
| Internal 2.5" Drive Bays: | Up to 4 |
| Internal 3.5" Drive Bays: | Up to 2 |
| Expansion Slots: | 7 |
| Top Ports: | Power button, reset button, Led button, HD Audio, USB 3.0 x 2, USB2.0x1 |
| Physical Specifications | |
| Case Dimension (HxWxD) | 470x215x415mm/18.5x8.5x16.3 inches |
| Weight: | 6.3kg /13.9lbs |
| Features | |
| Tempered Glass Sides Window: | High-quality tempered glass side window allows for clear visuals to inner components |
| Addressable RGB Light Effects: | All ARGB light sync. devices connected to the 5pin ARGB control hub, allowing the LED button to directly control the ARGB lighting or switch to the motherboard sync. software to control. |
| Available Fan Ports: | 3x120mm or 3x140mm Fan ports in the front(3x120mm ARGB Fan included) 3x120mm or 2x140mm Fan ports on the top 2x120mm fan ports on the top of PSU chamber 1x120mm Fan port in the rear(1x120mm ARGB Fan included) |
| Water Cooling: | Supports radiators up to 280/360mm in the Front Supports radiators up to 240mm in the Top |
| Dust Filters: | Removable (magnetic) mesh net on the top, Steel dust filter on bottom of chassis. |
| Power Supply Support: | Bottom mounted ATX Power Supply |



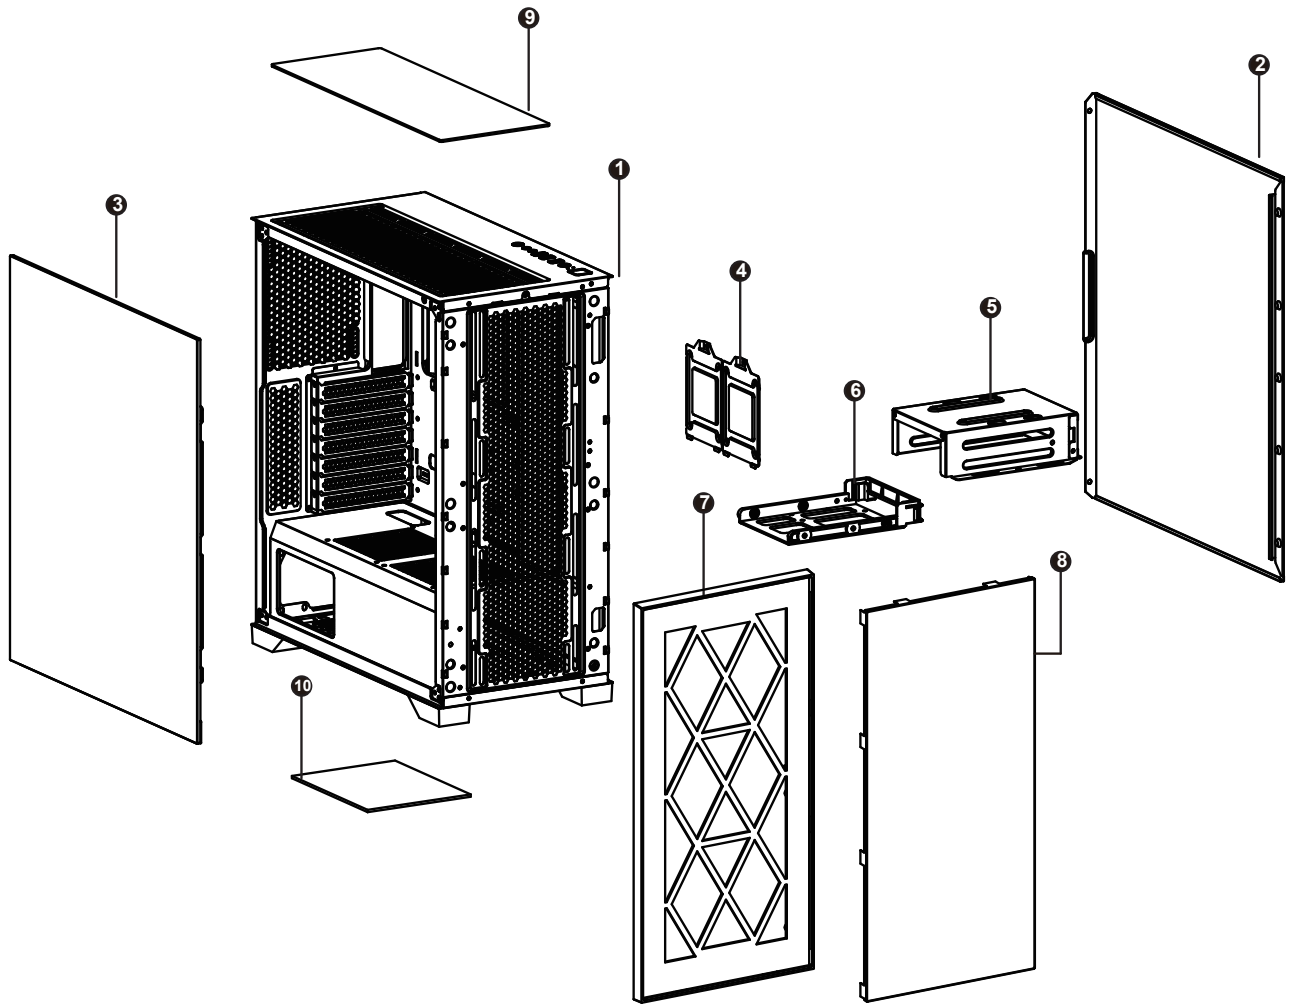

Chassis Parts




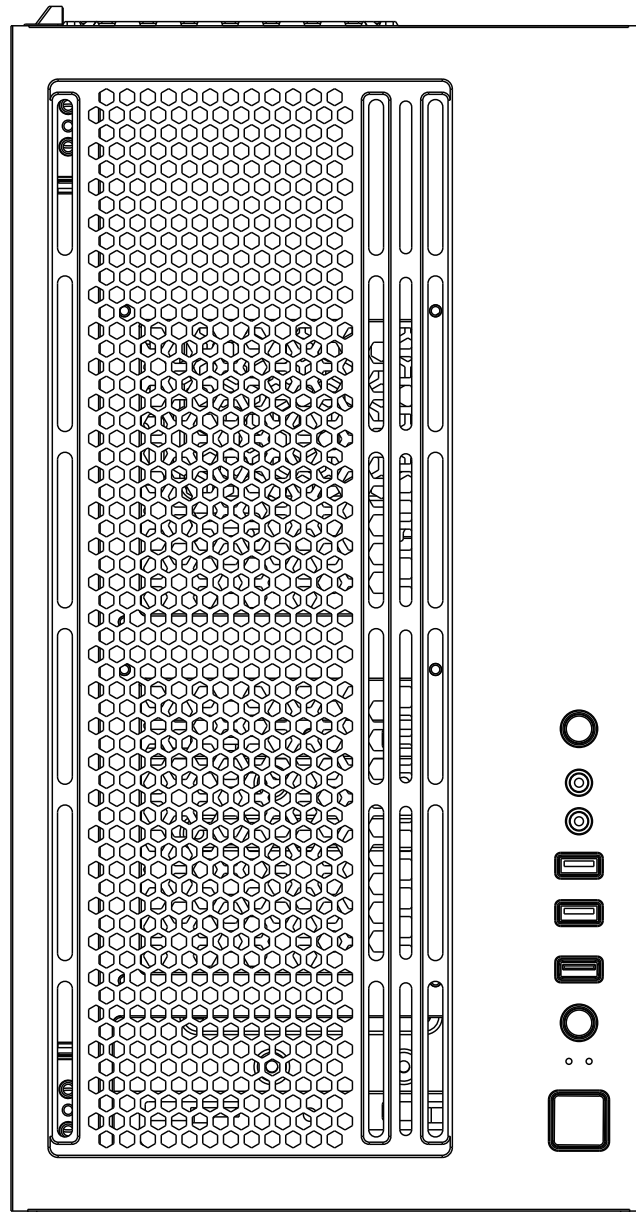

| | |
|----|------------------------------|
| 1 | Chassis |
| 2 | Metal side panel |
| 3 | Sliding tempered glass panel |
| 4 | 2.5" SSD tray x 2 |
| 5 | Hard disk cage |
| 6 | 3.5" HDD/ 2.5" SSD brackets |
| 7 | Front panel |
| 8 | Front steel mesh |
| 9 | Removable magnetic mesh |
| 10 | Steel dust filter |


Control Panel Functions



| | |
|---|-------|
|  | POWER |
|  | RESET |
|  | LED |
|  | Audio |

| | |
|---|-----------------|
|  | USB 3.0 (Blue) |
|  | USB 2.0 (Black) |
|  | Mic |


3.5" / 2.5" HDD/SSD Installation

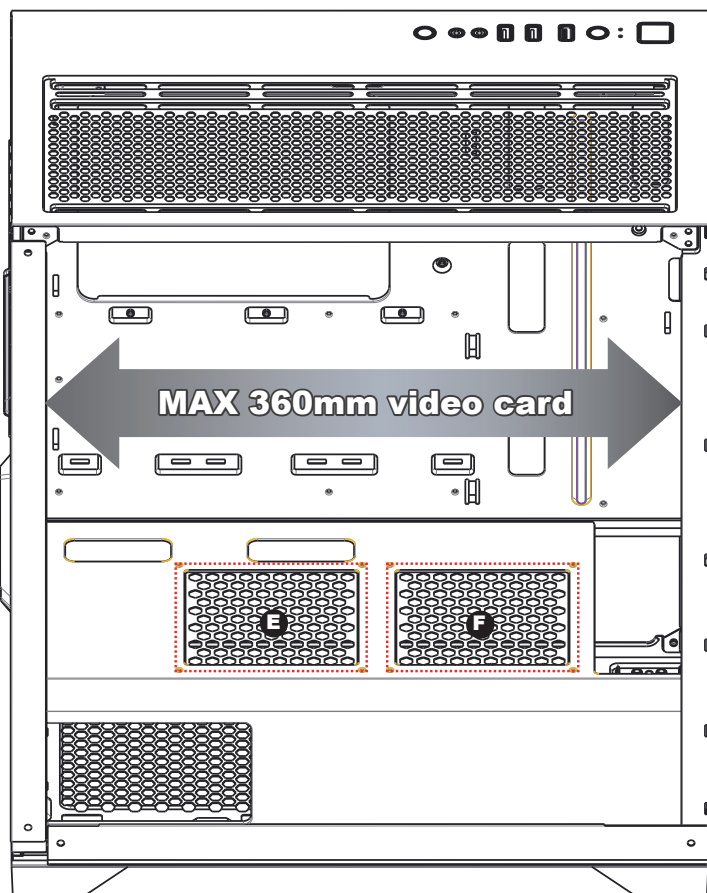

- Supports up to 360mm long video cards.
- Supports up to 120mm fan x2 (**E** **F**)




or


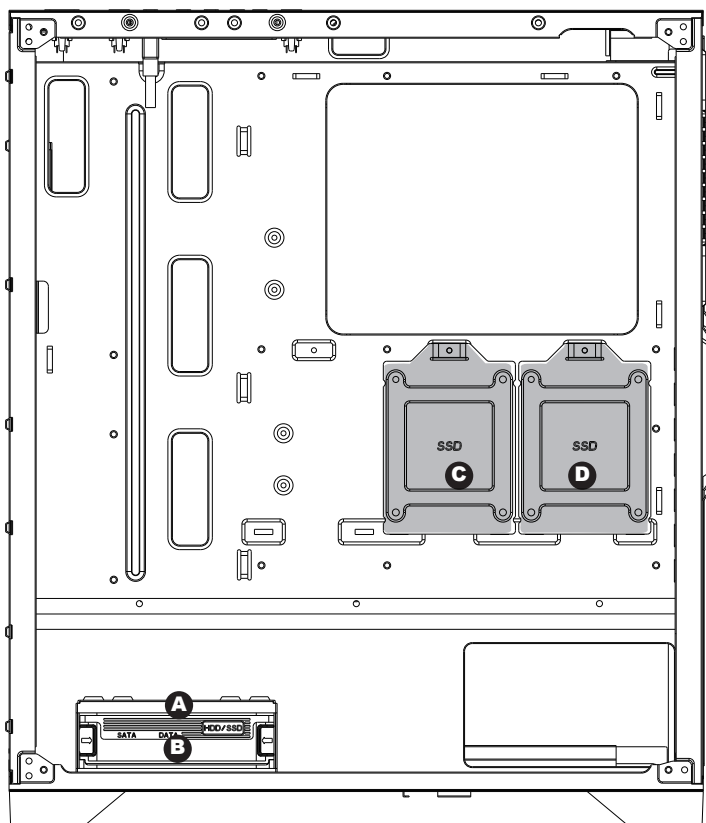


- Multifunctional hard disk cage support 3.5" HDD or 2.5" SSD x 1 (**A**)
- Multifunctional hard disk bracket support 3.5" HDD or 2.5" SSD x 1 (**B**)
- 2.5" SSD metal tray support 2.5" SSD x 2 (**C** **D**)

Front

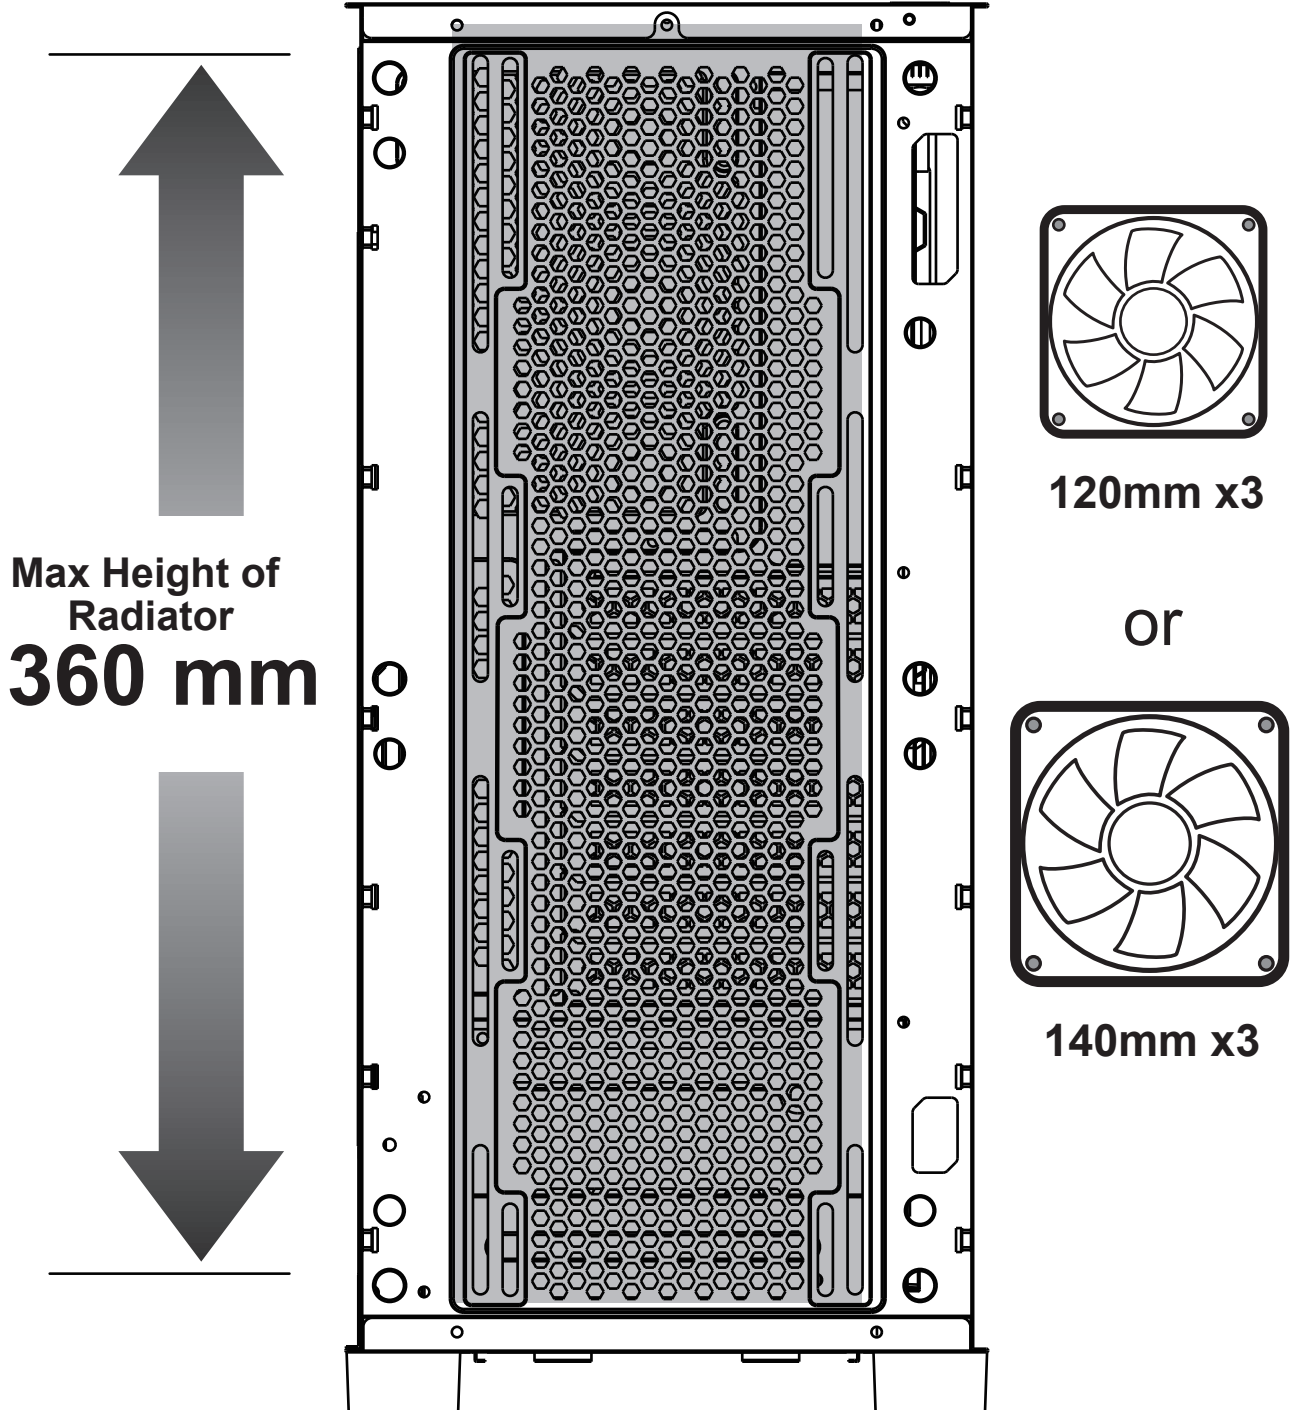


Rear

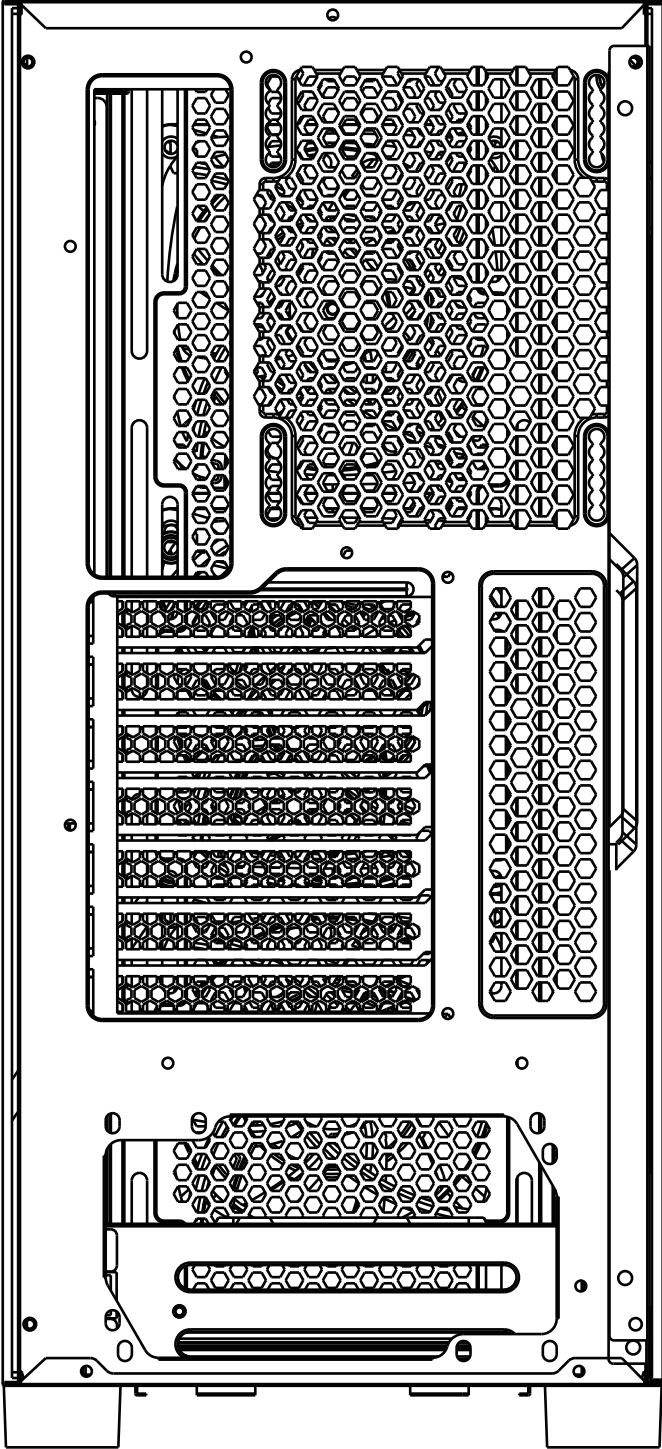


120mm x1

Top





120mm x3

or




140mm x2

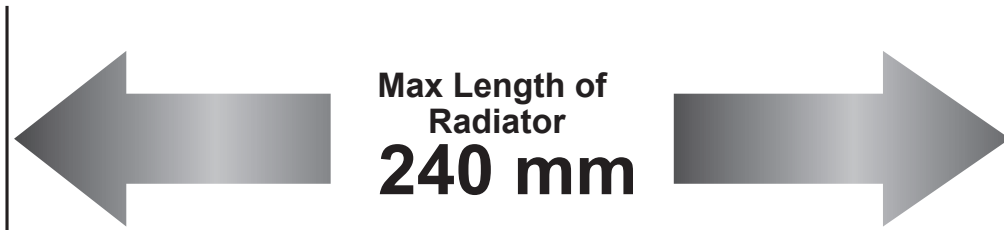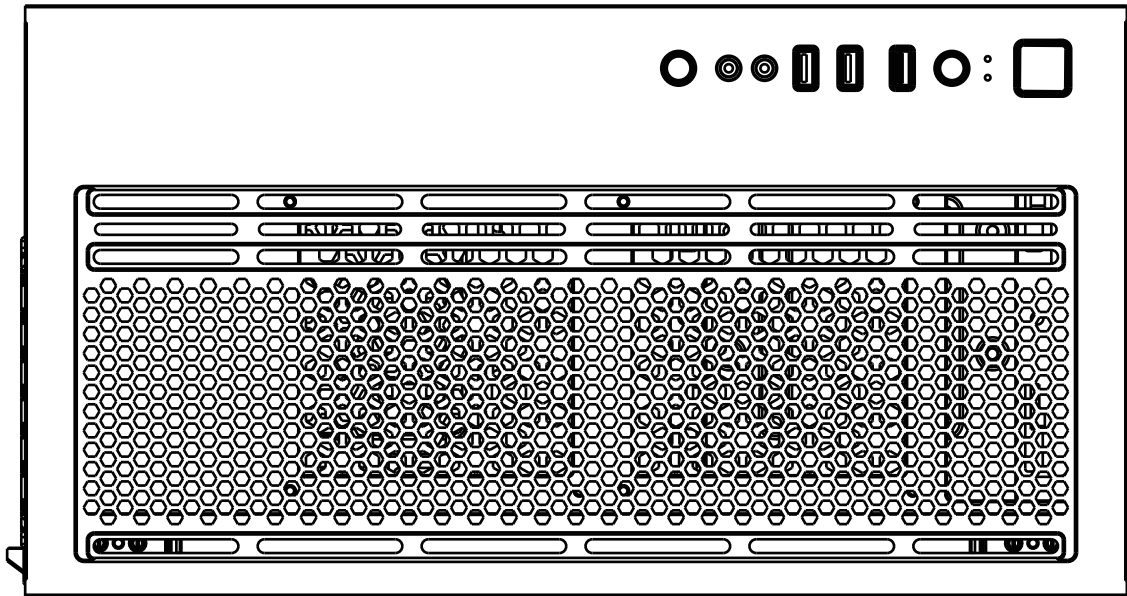


Max Length of
Radiator
240 mm


Fan Installation

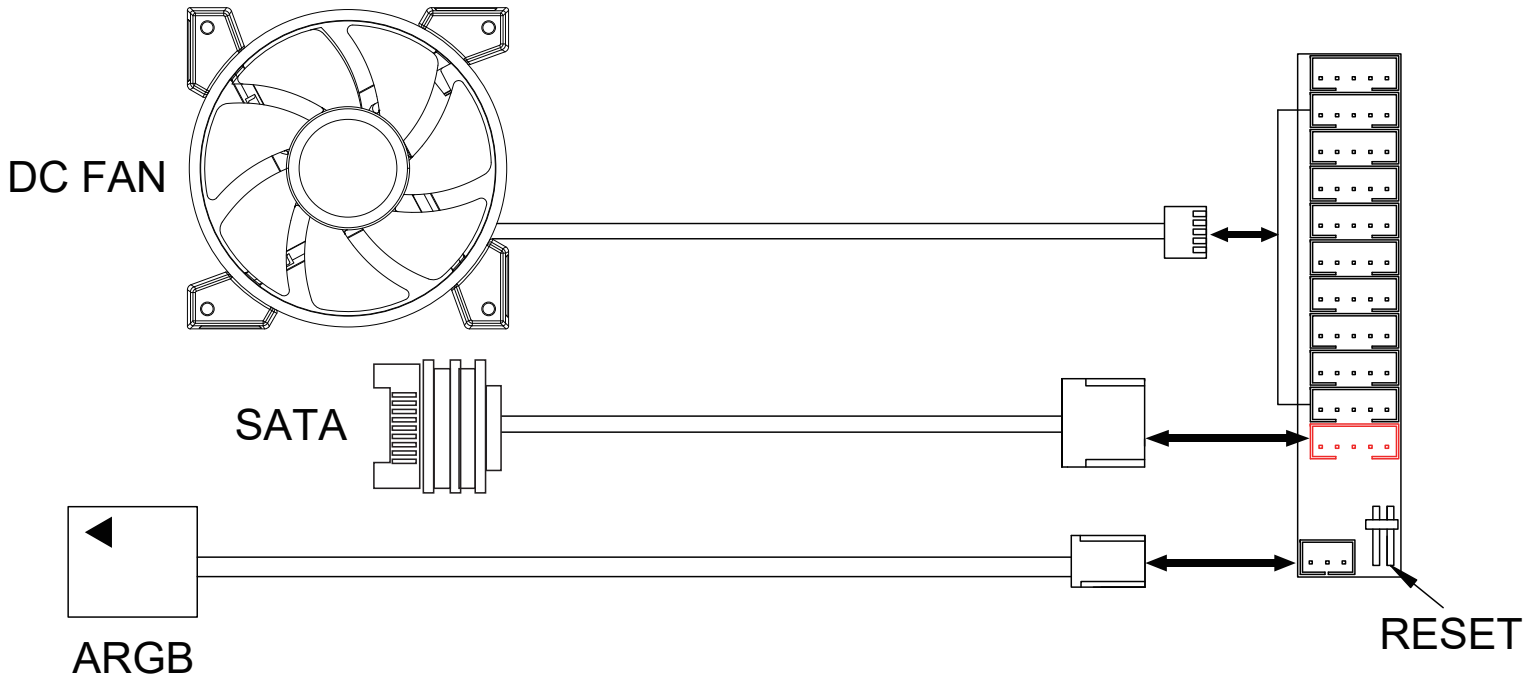

※ Press the LED button to cycle through different RGB 15 lighting modes, controlled by the LED button.

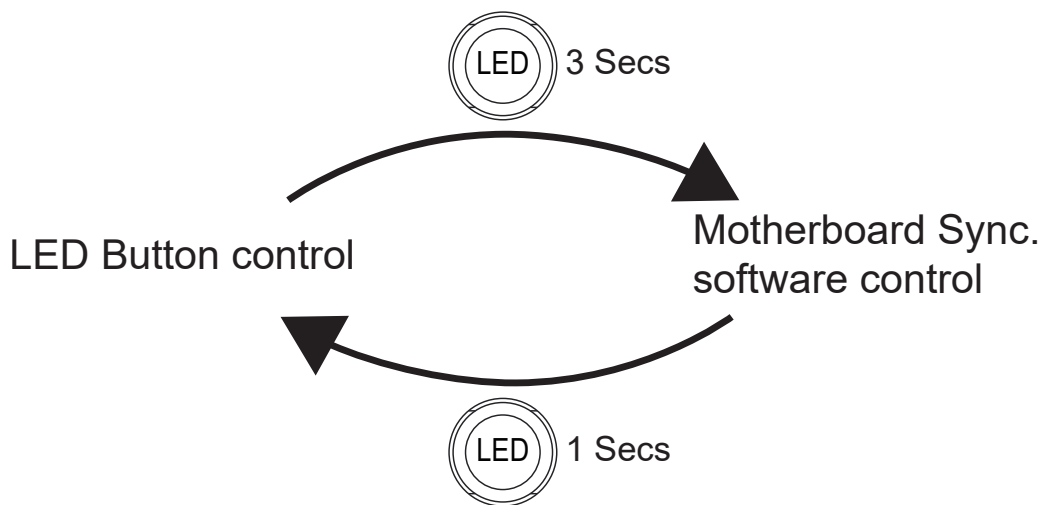

ARGB Control Modes Switching

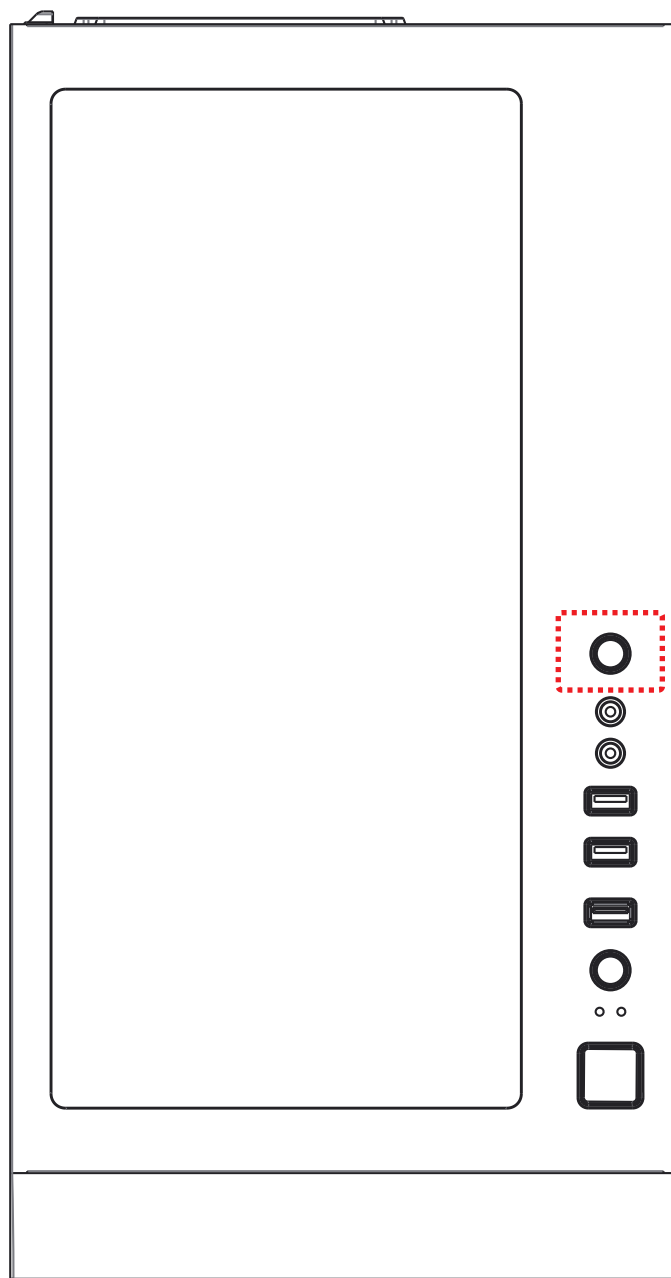

※ Press the LED button to cycle through different RGB lighting modes, controlled by the LED button though the ARGB control board.

